





You should have...



First check you've got all the fittings that come with your Vertical blind.



Top fix brackets
min 2



Screws: min 4
Rawl plugs: min 4




Face fix brackets don't come with blinds to be hung inside the window (recess blinds). If you need brackets, just call us on **0845 604 9611**




Wood screws: min 4




Weights




Stabilising chains: 2




Hangers: one per louvre



Cord weight: 1



Blind: 1



Allen Key: 1

Fitting your Vertical blind

Before you start, check you have your brackets

Your blind brackets are packed separately. The top fix brackets are in the headrail box and the face fix brackets are in the louvre box. Check you've taken them out before you throw the packaging away.

You can fit your Web-Blinds Vertical blind in 4 straightforward stages. Just do these in order and you'll soon have your new blind up.

1. Fit the headrail
2. Adjust the cord that opens and closes the blind
3. Adjust the chain that operates the louvres
4. Fit the louvres

Stage 1: Fit the headrail


1 Fitting your blind outside the window (exact fitting)

To make sure the centre of the rail is precisely in the middle of your window, the measurements at either end (C) need to be the same. To work out C:

- measure the width of the window (measurement B). Write down the measurement.
- measure the width of the blind (measurement A). Write down the measurement.

Take measurement B away from measurement A and divide the answer by 2 to get measurement C.

Now follow the instructions for **face fixing**.

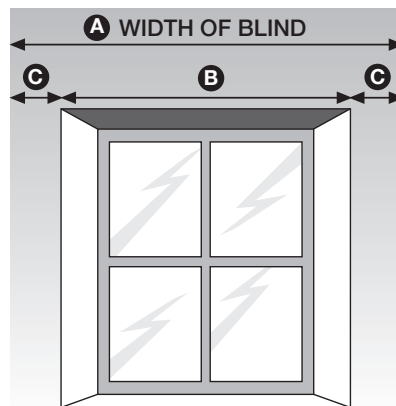

TOP FIX FACE FIX

Fitting your blind inside the window (recess fitting)

You need to decide whether to **face fix** or **top fix** your blind.

Top fix your blind to the lintel if:


- you have uPVC window frames, or
- there are obstructions like handles

Face fix your blind if:

- you want to fit the bracket to the window frame


2 Face fixing

Lightly screw the short screws into place. Position the brackets approximately 5cm from the ends of the headrail. Mark holes at A and screw the brackets into place.




Top fixing

Measure and mark the distance any handles stick out. Using the louvre hanger, find and mark the fitting position (A). Drill the brackets into position 5cm away from the side walls.




3 Face fixing

With carriage C closest to you, hook the back of the headrail into the brackets. Tighten the short screws to lock the headrail into place.

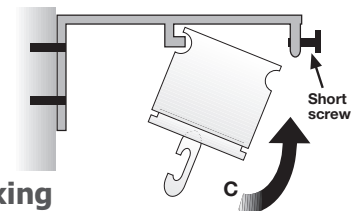

Top fixing


Tilt and hook the front of the headrail into the bracket, with carriage C closest to you. Press the back up into position until it clicks. To release the blind, push B up.




It is recommended that in order to complete stages 2 & 3 you remove the headrail from the brackets. But first check what length you would like your cord and chain to be when the blind is hung.

Stage 2: Adjust the cord


- 1** Put the cord weight on the cord.

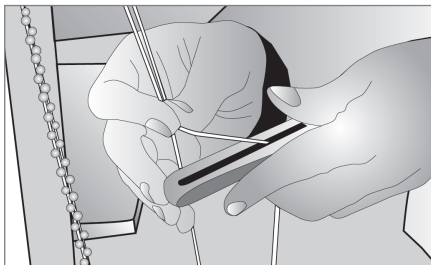

- 2** Take a tight hold of the knotted loose cord in the headrail, then loosen the screw that holds it in place using the Allen key. Make sure the cord doesn't slip through.

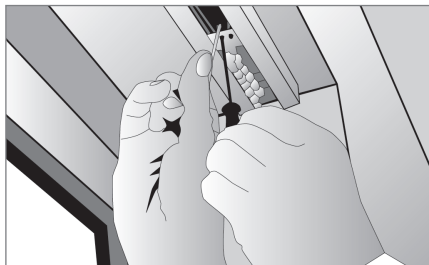

- 3** Pull the cord until it's the length you want and re-tighten the screw using the Allen key.

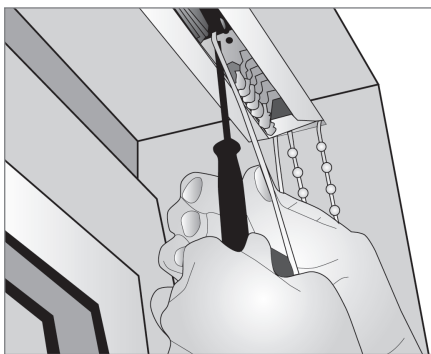


- 4** Trim off any excess cord.




Stage 3: Adjust the side chain length


- 1** Undo the chain connector.

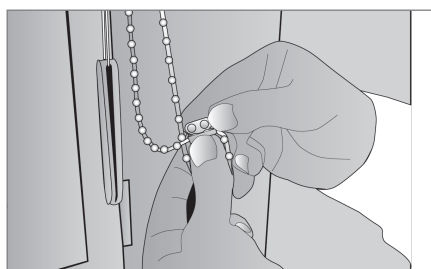


- 2** Take the chain out of the connector.

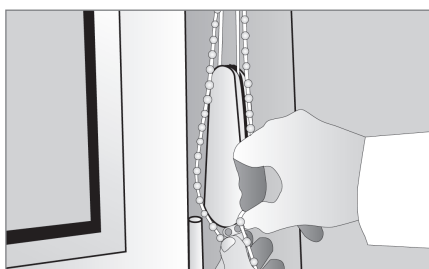

- 3** Shorten the chain so that it's the same length as the cord, then trim off the excess.

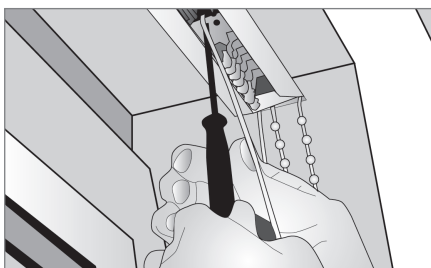


- 4** Put the ends of the chain in the connector and close it up. Make sure the carriage moves smoothly before you fit the louvres.

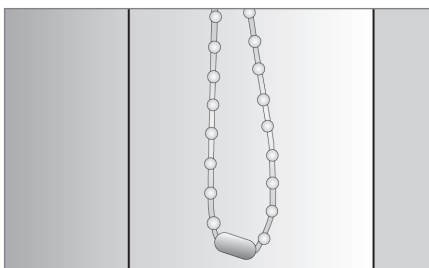


Stage 4: Fit the louvres

- 1** Break open the plastic on the roll of louvres. Keeping them in a roll, peel off one at a time and put a hanger (A) in each. Make sure all hangers are the same way up. This should be with the protruding section facing the top.

Clip the hangers onto the carriage, making sure the fabric overlaps are at the back and the louvres are in an open position. To shorten the length of the louvres turn the hangers (A) upside down. With the protruding section facing downwards

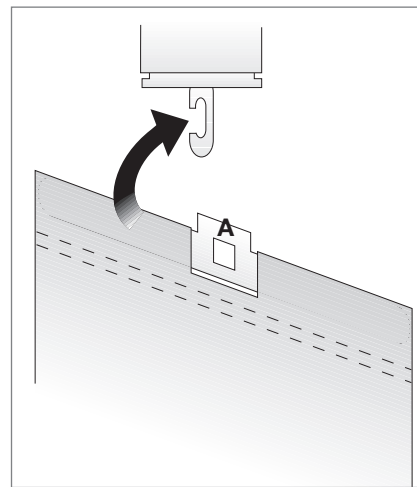

- 2** Starting from one end, snap the stabilising chain on to the bottom weights on both sides. To pull the louvres from side to side, use the cord. To rotate the louvres, use the stabilising chain.

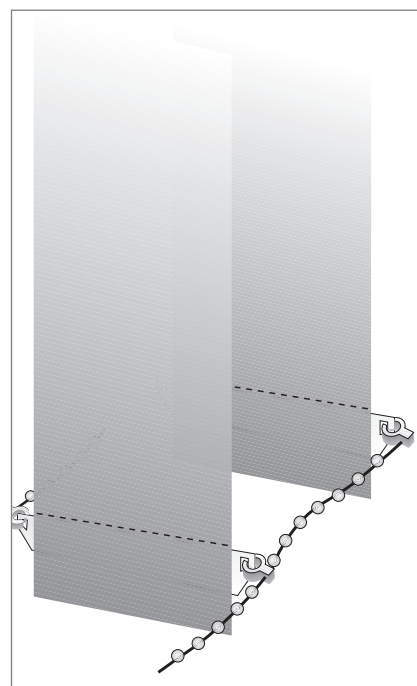

If the drop of the louvres is 75cm or less, we will provide you with a continuous chain loop to change.

Operating your blind

Operating your blind is easy. Just follow these instructions.

- To control the angle of the louvres, pull gently on the side chain.
- To open and close the blind, pull gently on the cord
- Don't use the cord to close the blind unless the louvres are fully open.
- If one of the louvres is out of alignment, pull the side chain until they're all closed, then pull the side chain until they're all aligned. You might feel some resistance until they're all back in place. Don't be alarmed if it makes a noise whilst doing this.
- If the side chain connector reaches the headrail it will stop the louvres from rotating. If this happens, just pull the side chain in the opposite direction until the connector is at the bottom of the loop.
- To make sure the louvres glide smoothly, try some silicon-based furniture polish inside the headrail.

Be safe

- Keep all cords and chains out of children's reach.
- Install safety devices such as cleats and cord tidies to keep cords away from children. You can request a free safety device when you make your Web-Blinds order. If you've already got your Web-Blinds blind, you can still get a free safety device. Just call us on **0845 604 9611** 8.30am - 6pm, Monday to Friday and 9am -1pm.
- Move cots, beds and other furniture away from blinds

**Need help fitting your blind? Call 0845 604 9611
8.30am - 6pm, Monday to Friday and 9am -1pm Saturday**