



1

INSTALL THE BRACKETS


The brackets offer two methods of installation:

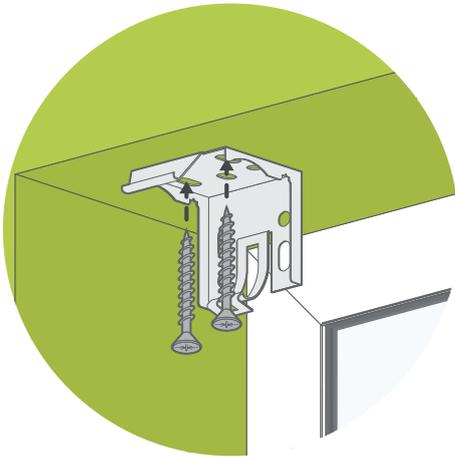

Top-Fix

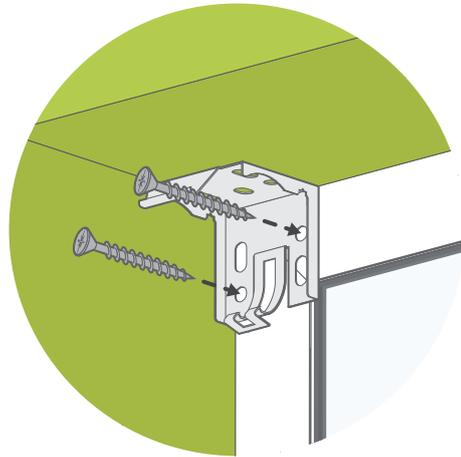


Face-Fix

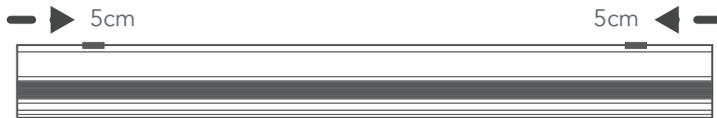


The outermost brackets should be mounted at least 5cm in from the ends of the blind. Any remaining brackets can be spaced evenly across the width of the blind.

2


INSTALL THE BLIND

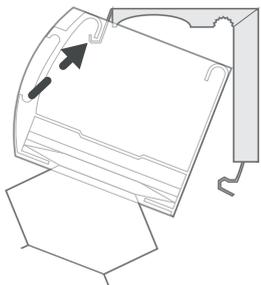


Rest the front lip of the headrail on the front hook of the bracket.

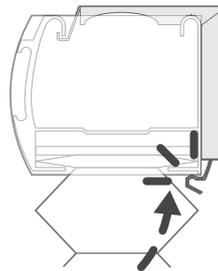


Twist the back of the headrail upwards until it snaps into place on the rear hook of the bracket.

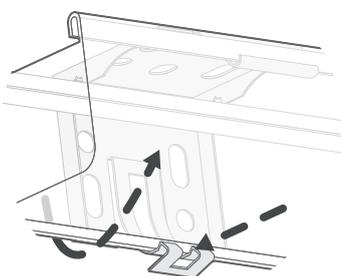

To remove the blind from the brackets, use a screwdriver to gently lever back the tab protruding from the rear of the headrail, at the bottom. At the same time, twist the back of the headrail down. Repeat for each bracket, taking care to maintain a good grip on the blind so that it doesn't fall down suddenly when the last bracket is released.


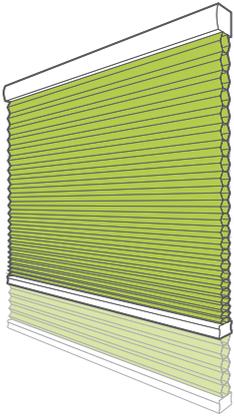


When you've first installed your blind, you may find that it does not drop to its fullest extent when lowered, or springs back up slightly. This is normal, as the compressed fabric of the pleats needs some time to settle. To help it along, start by pulling the blind down as far as it will stretch, brush your hand vigorously down the pleats a few times, then leave the blind lowered for 24 hours.

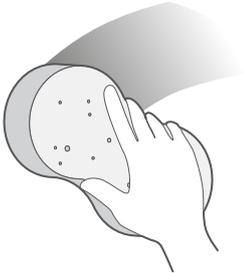

If cleaning is required, then a damp cloth or baby wipe is usually sufficient to wipe down the fabric. Do not soak the fabric as the pleats can stretch and lose their shape.

Usually though, a regular dusting using the brush attachment of a vacuum cleaner is all that's required to keep the blind looking great.

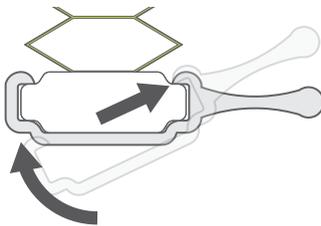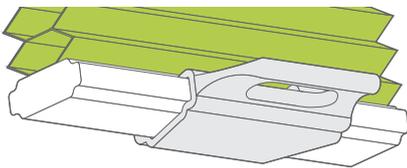

Fitting the provided handle is optional. To fit it to the blind, hook the front part of the bracket over the front lip of the blind's bottom rail, then push the back of the handle firmly upwards until it snaps into place over the rear lip of the rail.